


The Seakeeper 1 is designed to eliminate up to 95% of boat roll on recreational vessels ~23 to 30 feet (7-9 meters) or up to ~5.5 tons. It features a flush mount design for easier installation, runs exclusively on 12V DC power, has no outside appendages and can be installed virtually anywhere on board.

These specifications are highly confidential and subject to change as we will not publicly launch the Seakeeper 1 until early 2020.


TECH SPECS

Rated Speed	9,750 RPM
Angular Momentum at Rated RPM	1,000 N-M-S
Max Anti-Rolling Torque at Rated RPM	2,620 N-M
Spool-up Time to Rated RPM	31 minutes (9,750 RPM)
Spool-up Time to Stabilization	21 minutes (8,290 RPM)
Spool-up Power	
DC Input	600 Watts Max
DC Input Voltage	12 VDC @ 55 Amps
Operating Power	
DC Control	300 - 600 Watts (Sea State Dependent)
DC Input Voltage	12 VDC @ 55 Amps
Weight	350 lbs (159 kg) Approximately
Envelope Dimensions	
	Length x Width x Height
	22.90 L x 23.56 W x 15.68 H (Inches)
	0.582 L x 0.598 W x 0.398 H (Meters)


PORT VIEW

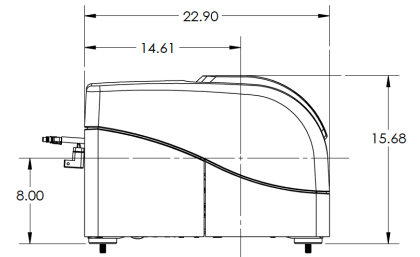

FRONT VIEW



TOP VIEW

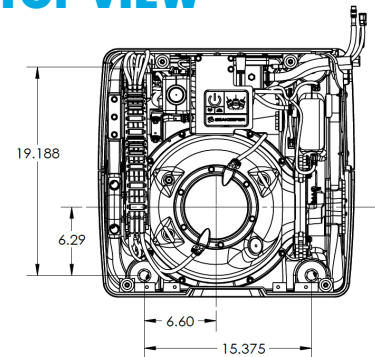

BOTTOM VIEW

