


The Seakeeper 26 is designed to eliminate up to 95% of boat roll on recreational vessels ~70 to 84 feet (21-25 meters) or up to ~75 tons. It requires modest electrical power, has no outside appendages and can be installed virtually anywhere on board.




TECH SPECS

Rated Speed	5,000 RPM
Angular Momentum at Rated RPM	26,000 N-M-S
Max Anti-Rolling Torque at Rated RPM	56,000 N-M
Spool-up Time to Rated RPM	90 minutes (5,000 RPM)
Spool-up Time to Stabilization	70 minutes (4,250 RPM)
Spool-up Power	
AC Motor	3000 Watts Max
DC Control	240 Watts
Operating Power	
AC Motor (sea state dependent)	1000 - 3000 Watts
DC Control	240 Watts
AC Input Voltage	208 - 230 VAC (+/-10%), 50/60 Hz, Single Phase
DC Input Voltage	24 VDC @ 10 Amps
Sea Water Supply to Heat Exchanger	30 LPM (8 GPM) Maximum 15 LPM (4 GPM) Minimum
Ambient Air Temperature	0° - 60° C (32° - 140° F)
Weight	3,010 lbs (1,365 kg) Bolt-in Installation
Envelope Dimensions	Length x Width x Height 52.7 L x 55.9 W x 40.4 H (Inches) 1.34 L x 1.42 W x 1.03 H (Meters)
Noise Output	At full operating RPM, steady state noise measured in the factory at a 1 meter distance measures 72 - 74 dBC. (Sound levels may be higher during spool-up)

PORT VIEW

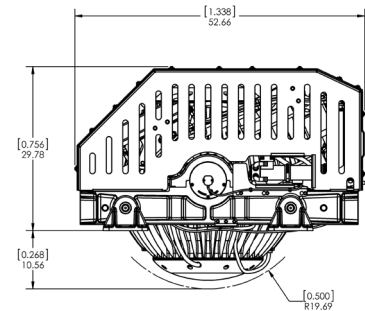

FRONT VIEW

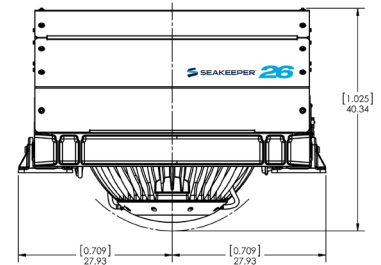

TOP VIEW

