


The Seakeeper 6 is designed to eliminate up to 95% of boat roll on recreational vessels ~46 to 52 feet (12-15 meters) or up to ~24 tons. It requires modest electrical power, has no outside appendages and can be installed virtually anywhere on board.

TECH SPECS


Rated Speed	9,700 RPM
Angular Momentum at Rated RPM	6,000 N-M-S
Anti-Rolling Torque at Rated RPM	15,690 N-M
Spool-up Time to Rated RPM	40 minutes (9,700 RPM)
Spool-up Time to Stabilization	24 minutes (7,700 RPM)
Spool-up Power	
AC Motor	2300 Watts
DC Control	125 Watts
Operating Power	
AC Motor (sea state dependent)	1050 - 2300 Watts
DC Control	125 Watts
AC Input Voltage	110 - 230 VAC (+/- 10%), 50/60 Hz, Single Phase
DC Input Voltage	12 VDC @ 15 Amps
Sea Water Supply to Heat Exchanger	30 LPM (8 GPM) maximum 15 LPM (4 GPM) minimum
Ambient Air Temperature	0° - 60° C (32° - 140° F)
Weight	395 kg (870 lbs)
Envelope Dimensions	Length x Width x Height 0.756 L x 0.755 W x 0.626 H (meters) 29.77 L x 29.71 W x 24.65 H (inches)
Noise Output	At full operating RPM, steady state noise measured in the factory at a 1 meter distance measures 70 - 72 dBC. (Sound levels may be higher during spool-up)



PORT VIEW

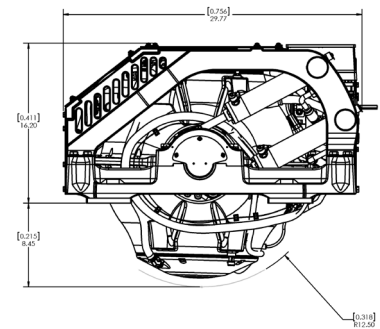

FRONT VIEW

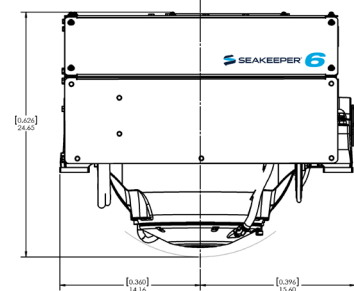

TOP VIEW

